



Station P2S

| Entertainment·Geek PC

T-CHIP INTELLIGENCE TECHNOLOGY

V1.0



Product features




Quad-core 64-bit processor

Quad-core 64bit Cortex-A55 processor, 22nm lithography process up to 2.0GHz



8 G B l a r g e R A M

Up to 8GB RAM, frequency up to 1600MHz



G P U / V P U / N P U

OpenGL ES3.2/2.0, Vulkan1.1
4K@60fps H.265/VP9 video decoding
1080P@100fps H.265 video encoding
1TOPS NPU




Dual Gigabit Ethernet

Dual 1000Mbps(RJ45)
2.4G/5G Dual-band WiFi, BT5.0
4G LTE module can be expanded



O p e r a t i n g s y s t e m s

Support Station OS, Android and Ubuntu Operating systems



A variety of interfaces



Control Port (RS232*2, RS485*1), HDMI2.0, GE (RJ45), USB3.0, USB2.0, USB-C (OTG)

Specifications






Specifications	
SOC	RK3568
CPU	Quad-core 64-bit Cortex-A55 processor, 22nm lithography process, frequency up to 2.0GHz
GPU	ARM G52 2EE, Support OpenGL ES 1.1/2.0/3.2, OpenCL 2.0 and Vulkan 1.1, Built-in high-performance 2D acceleration hardware
NPU	1Tops@INT8 RKNN NPU AI accelerator, support one-click switching of Caffe/TensorFlow/TFLite/ONNX/PyTorch/Keras/Darknet
VPU	4K@60fps H.265/H.264/VP9 video decoding, 1080P@60fps H.265/H.264 video encoding
RAM	2GB/4GB/8GB LPDDR4
Storage	16GB/32GB/64GB/128GB eMMC, 16MB SPI Flash
Storage Expansion	1*SATA 3.0 (2.5inch, 7mm thickness SSD/HDD), 1*TF Card Slot
Ethernet	2*1000Mbps (RJ45)
Wireless	2.4G/5GHz Dual-band WiFi, 802.11 a/b/g/n/ac, Bluetooth 5.0, 4G LTE network communication can be expanded
Video output	1*HDMI2.0 (4K@60Hz)
Camera	1*MIPI-CSI, support HDR function
Audio	1*HDMI audio output, 1*Phone headphone jack (3.5mm)
USB	1*USB3.0 (Max:1A), 2*USB2.0 (Max:500mA), 1*USB-C (USB2.0 OTG)
Extended Interface	1*RJ45 Control Port (1*RS485 + 2*RS232), 1 × PH2.0-30P (PWM, GPIO, I2S, I2C, UART, SPDIF), 1*PH2.0-6P (POE)
Power	DC 12V (5.5*2.1mm, support 9V~24V wide voltage input)
OS	Android 11.0, Ubuntu 18.04, Buildroot +QT, Station OS
Dimension	142mm * 89mm * 35.5mm
Power Consumption	Idle: 0.3W(12V/25mA), Typical: 4.2W(12V/350mA), Max: 7.8W(12V/650mA)
Environment	Operating Temperature: -20°C- 60°C, Storage Temperature: -20°C- 70°C, Storage Humidity: 10% ~ 90%RH (non-condensing)

Interface description

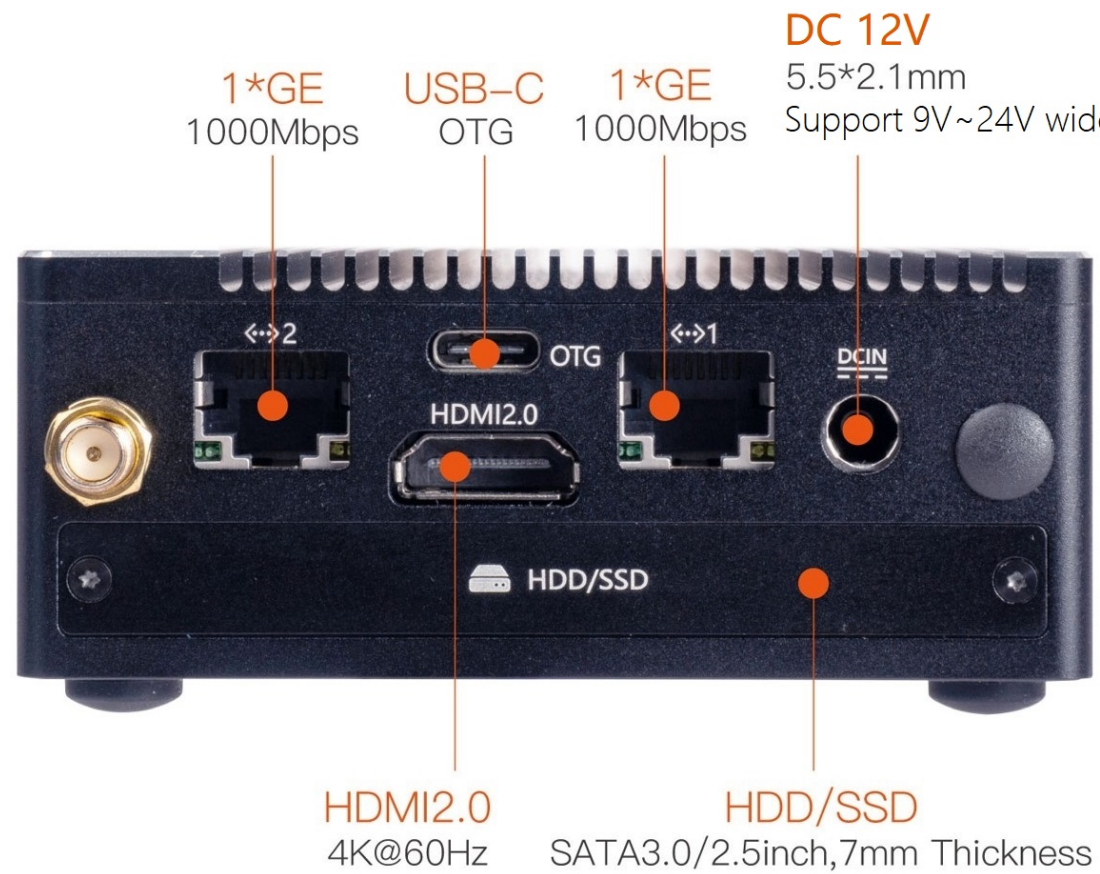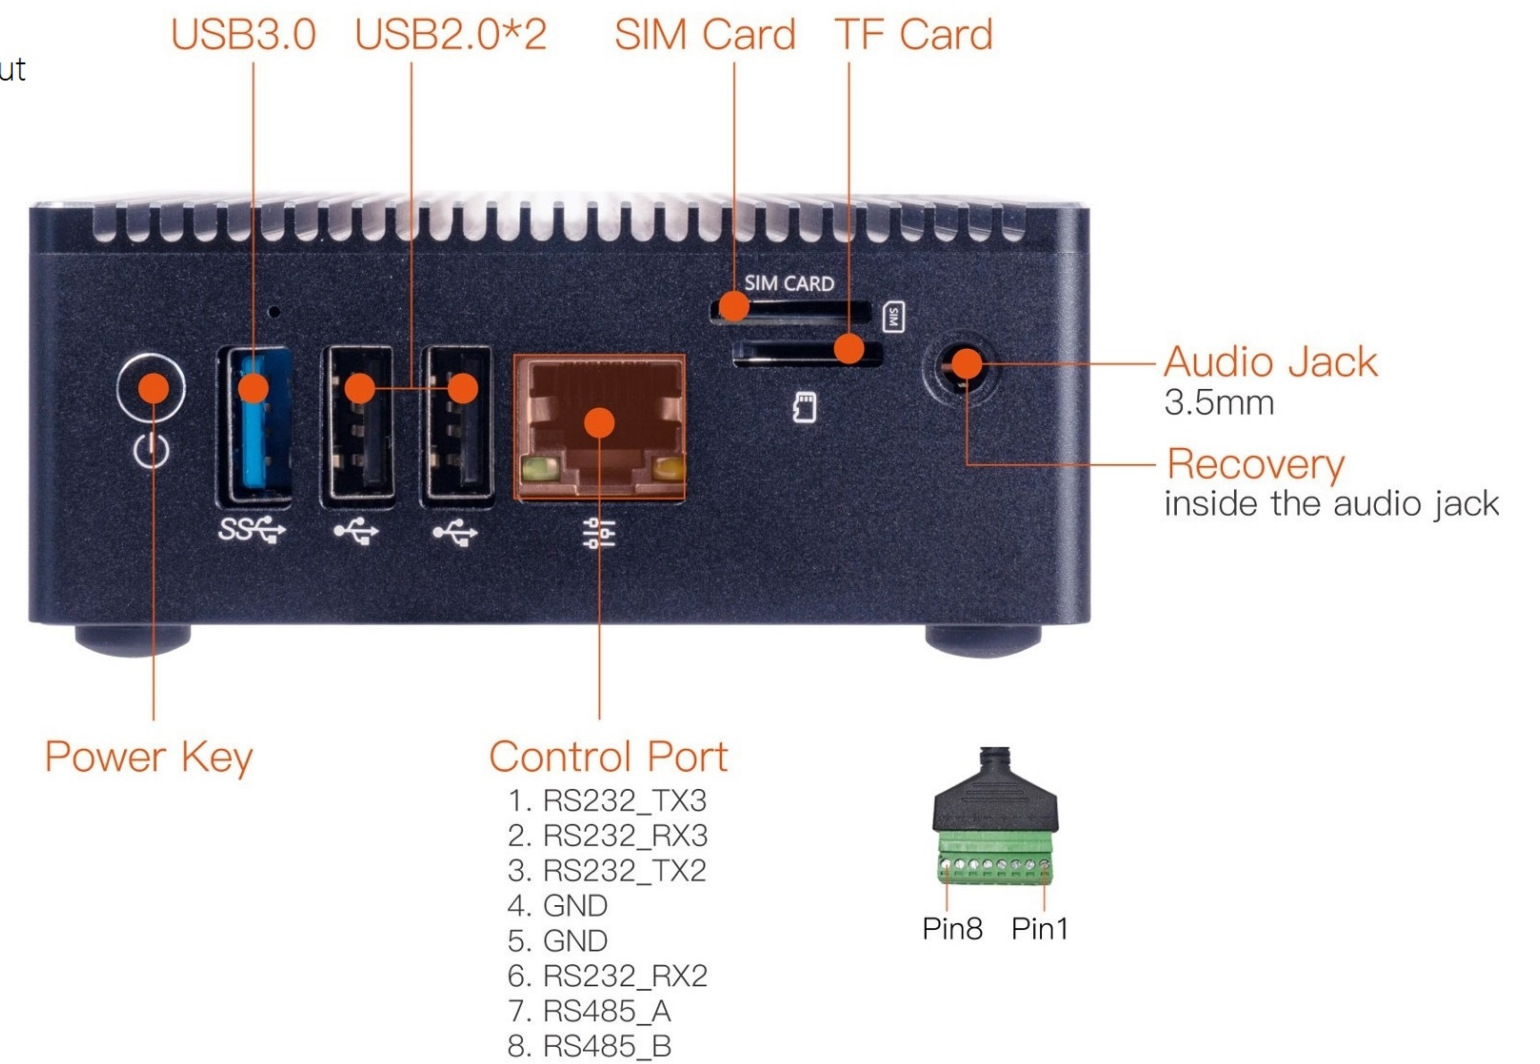

Dimension

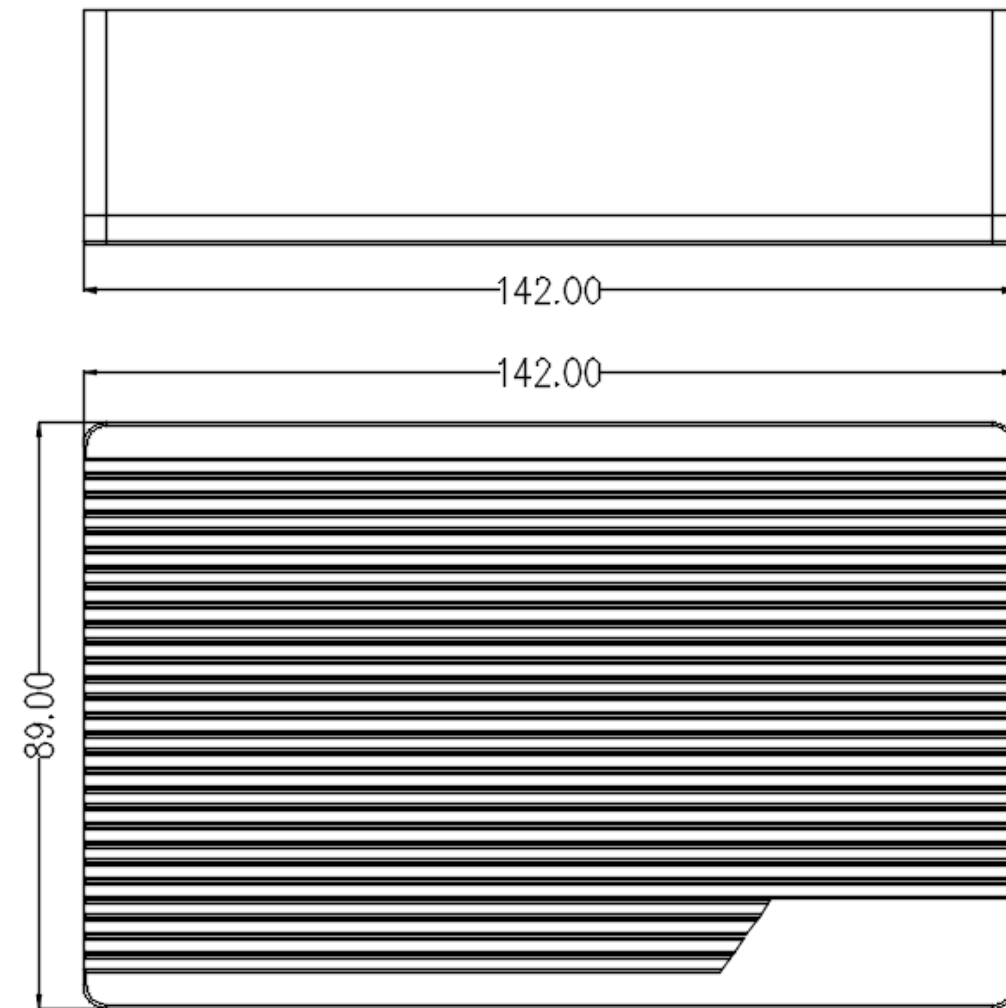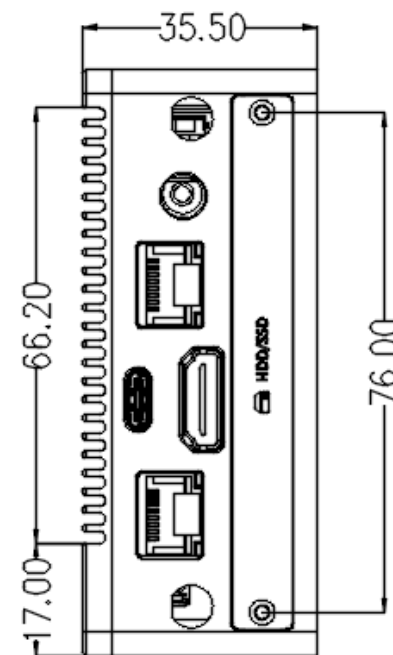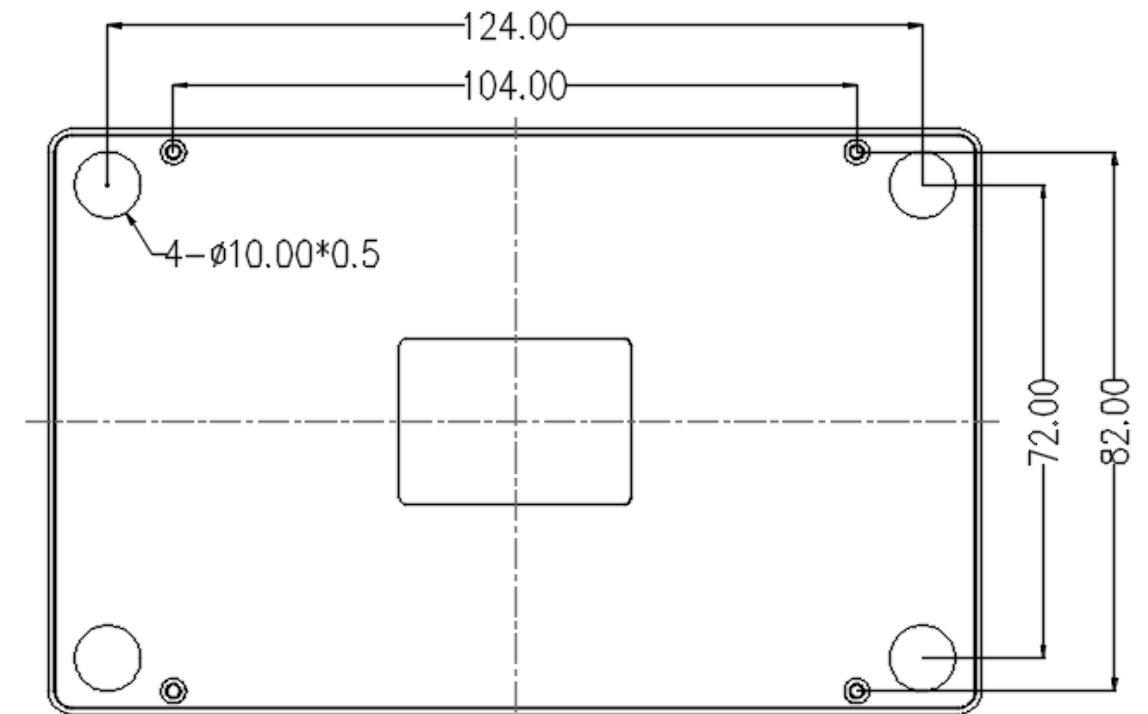



T-CHIP INTELLIGENCE TECHNOLOGY



Contact Us
(+86)18688117175



E-mail
global@t-firefly.com



Website
<https://en.t-firefly.com/>



Address
Room 2101, Hongyu Building, #57 Zhongshan 4Rd, East District,
Zhongshan, Guangdong, China.