



# Firefly-RK3399

## Product Specifications

|         |                                        |
|---------|----------------------------------------|
| Author  | T-chip Intelligent Technology Co.,Ltd. |
| Version | V1.0                                   |
| Date    | 2017-09-29                             |

| Version | Date       | Updated content  |
|---------|------------|------------------|
| V1.0    | 2017-09-29 | Original version |
|         |            |                  |
|         |            |                  |
|         |            |                  |



## Directory

|                                            |    |
|--------------------------------------------|----|
| <b>1. Product Overview .....</b>           | 4  |
| 1.1 Overview .....                         | 4  |
| 1.2 Application scenarios .....            | 4  |
| 1.3 Features .....                         | 5  |
| 1.4 The mainboard appearance.....          | 5  |
| <b>2. Hardware specifications .....</b>    | 9  |
| <b>3. PCB Size .....</b>                   | 10 |
| <b>4. Extended interfaces .....</b>        | 11 |
| 4.1 42PIN 2.54 spacing extension port..... | 11 |
| 4.2 port 1 for MIPI camera .....           | 12 |
| 4.3 port 2 for MIPI camera .....           | 12 |
| 4.4 CIF camera port.....                   | 13 |
| 4.5 EDP display port.....                  | 14 |
| 4.6 PCIe M.2 B-Key port.....               | 14 |
| 4.7 Mini PCIE port.....                    | 16 |
| <b>5. System software .....</b>            | 17 |
| <b>6. Electrical Performance.....</b>      | 17 |
| <b>Appendix .....</b>                      | 18 |
| 1 Source code acquisition.....             | 18 |
| 2 Contact us .....                         | 18 |



## Company Profile

T-Chip Intelligent Technology Co., Ltd. was founded in 2005. It has more than 10 years of research and development experience in scientific and technological products, has 6 invention patents and more than 30 computer software copyrights, and is a national high-tech enterprise. We focus on the research and development, design, production and sales of open source intelligent hardware, internet of things and digital audio products, and provide the overall solution for intelligent hardware products meanwhile.



Firefly is a brand owned by T-chip Technology. It operates open source products, open source communities and online stores. It has a large number of enterprise users and developer users, and its products are well received by users. Firefly open source products include open source boards, core boards, industry mainboards, etc. The open-source board series is the recommended board card by chip original factory Rockchip and obtain the support of native SDK. The core boards and industrial mainboards are widely used in commercial displays, advertisement integrated machines, intelligent POS, face recognition terminals, internet of things, intelligent cities, etc. At present, there are more than 100,000 users, including over 2,000 enterprise users. And well-known users include ARM, Google, Baidu, Tencent, Alibaba, etc.

Firefly team has more than 60 research and development members and has the research and development capabilities in schematic design, PCB layout, mainboard production, embedded development, system development, application program development, etc., which accelerates the research and development process for many technology entrepreneurs and start-ups, and provides professional technical services..


" Make technology more simple, Make life more intelligent " is the idea of Firefly team. We hope to make the research and development of various technology products efficient and simple, and let intelligent technology integrate in our lives through the open source products and technical services of Firefly.



## 1. Product Overview

### 1.1 Overview

Firefly-RK3399 is an open source high-performance platform that is elaborately created by the Firefly team. It uses RockChip RK3399 six core chip, with 1.8GHz main frequency. It has 3G, 4G data communication interfaces, USB3.0, high-performance PCIE ports, and supports commonly used external devices. It has multiple ports, with stable performance.

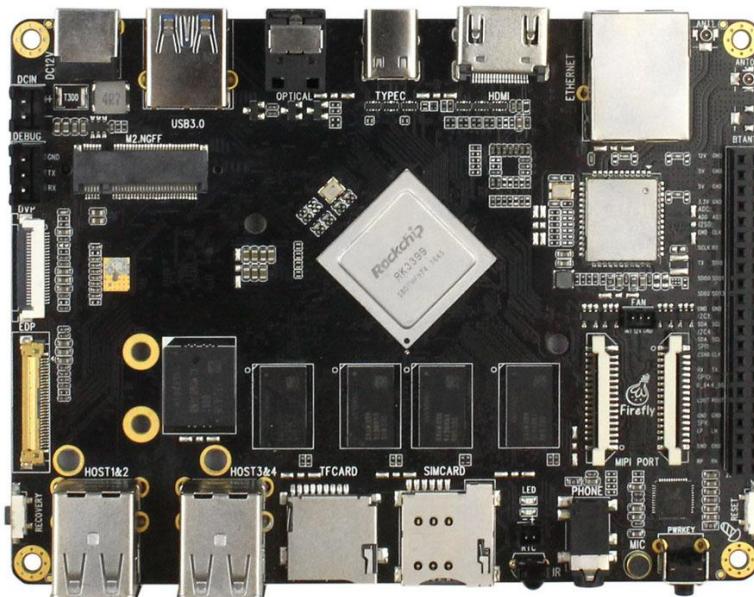

It also supports Android\Linux\Ubuntu systems, and software support is perfect. The open source code is suitable for secondary development of enterprises, high-definition commercial advertising machines, VEMs, education terminals, etc..It lowers the barrier for research and development, and shortens the product development cycle.

### 1.2 Application scenarios


|                                |                      |                   |                |                         |
|--------------------------------|----------------------|-------------------|----------------|-------------------------|
|                                |                      |                   |                |                         |
| VR equipment                   | 3D Camera            | Robot             | IOT            | PC                      |
|                                |                      |                   |                |                         |
| Network Attached Storage (NAS) | Home audio equipment | Vehicle equipment | Cluster server | Intelligent interaction |







### 1.3 Features



- Multiple display interface: It supports **dual MIPI** multiple display output interfaces. It also **Support dual-screen identical display/dual-screen differential display.**
- High-performance serial peripheral interface: **1×USB 3.0 port, 1×PCIE port**, extensible high-speed SSD memory, suitable for servers and other scenarios
- A variety of network interfaces: **2.4GHz/5GHz dual-band WIFI, Bluetooth4.1, Gigabit Ethernet, Onboard Mini PCIe interface, extensible 3G/4G communication module**
- Perfect system software: It supports open source operating systems such as Android, Phoenix , Flint OS Desktop Office Automation System

### 1.4 The mainboard appearance

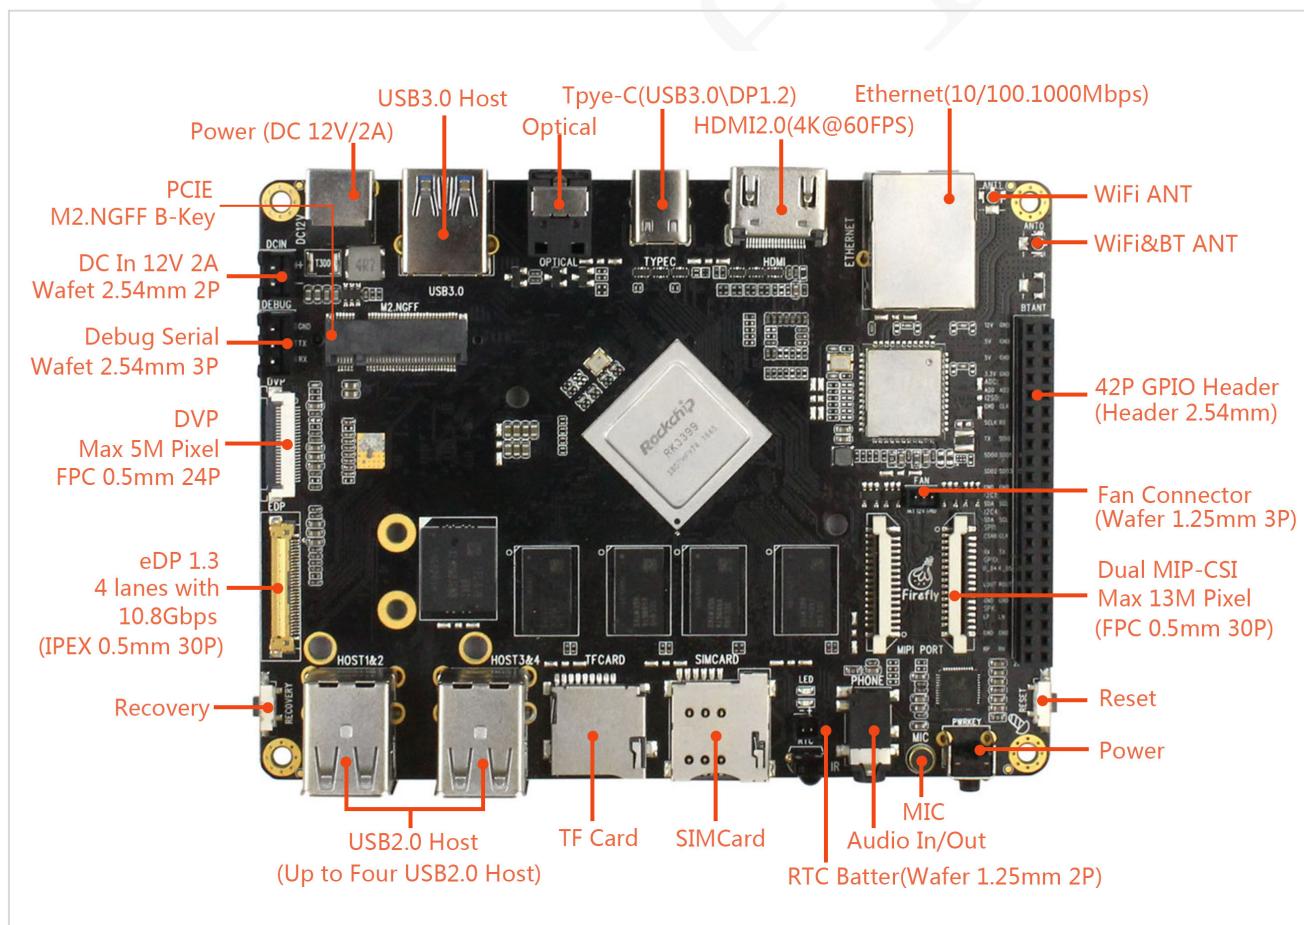

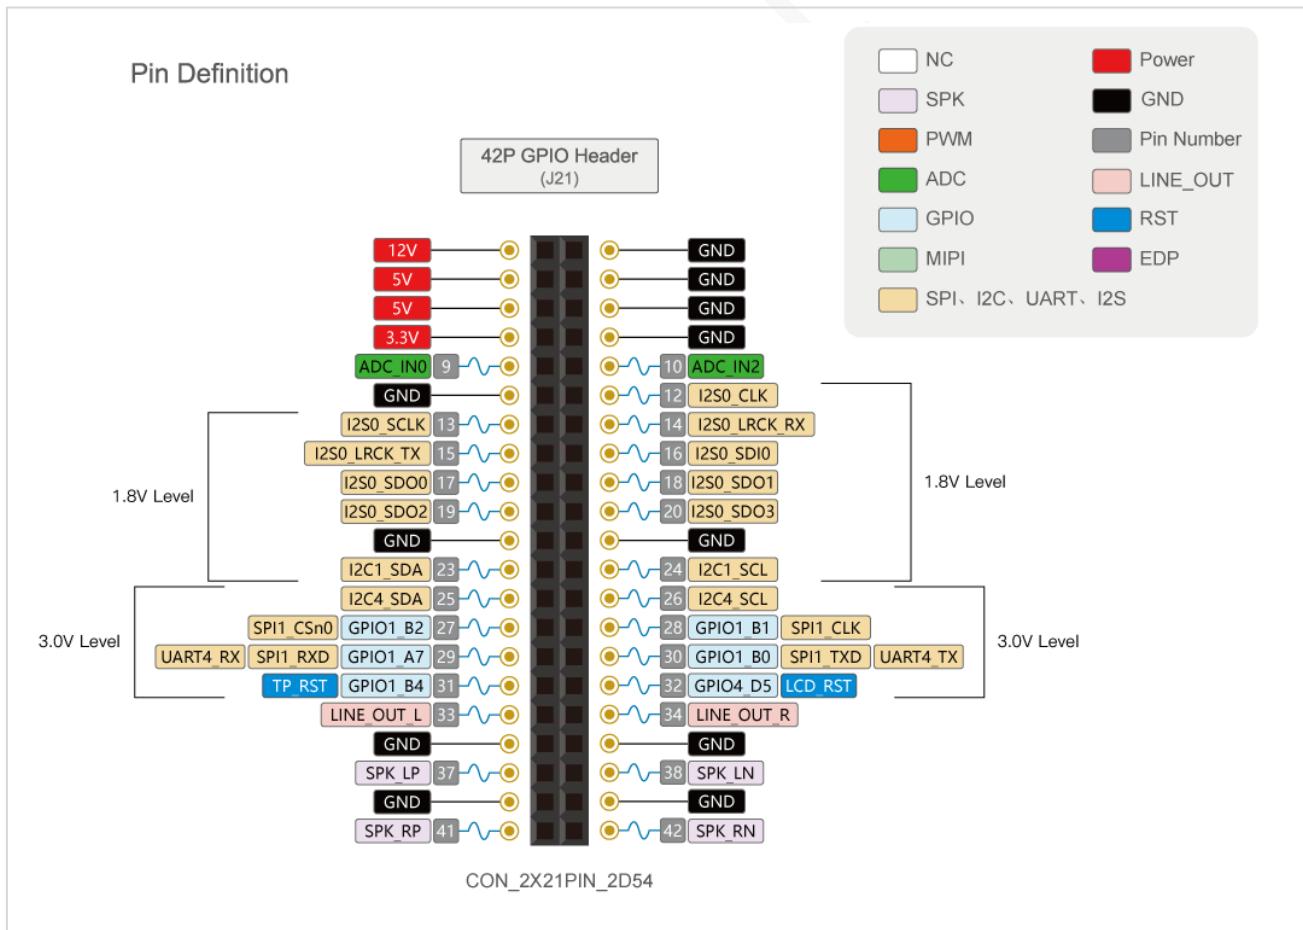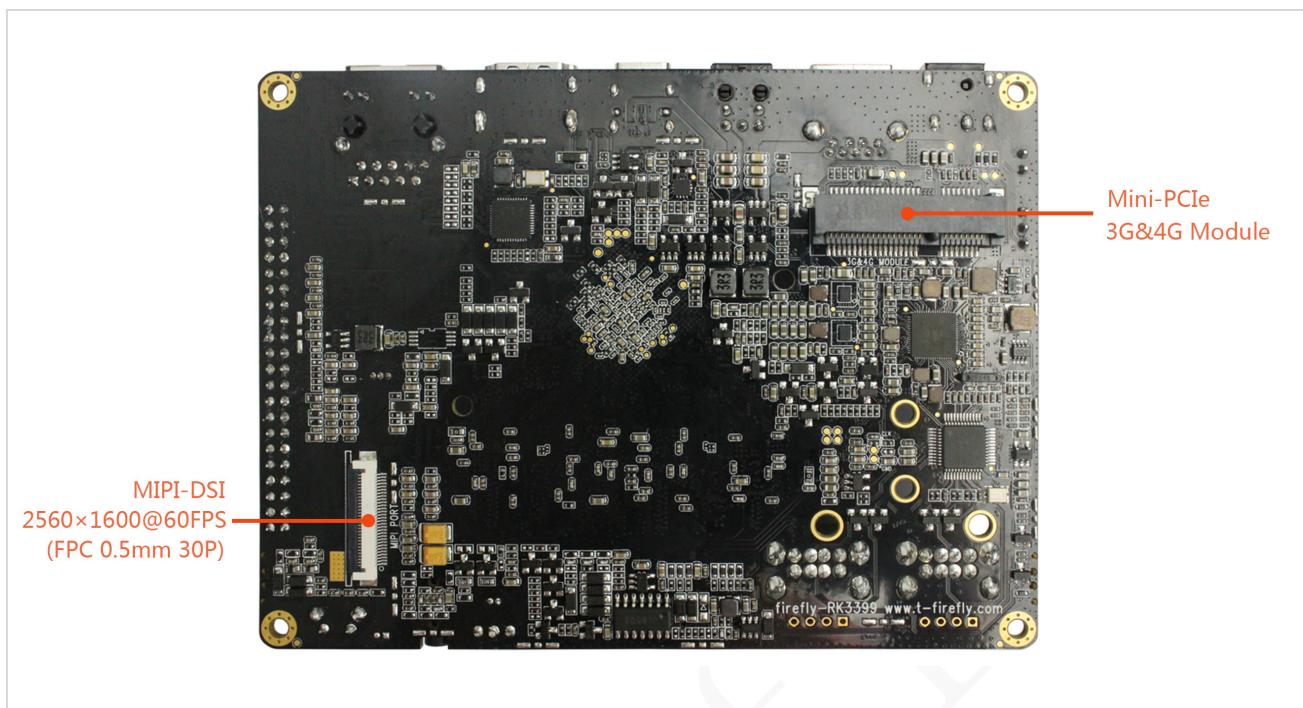

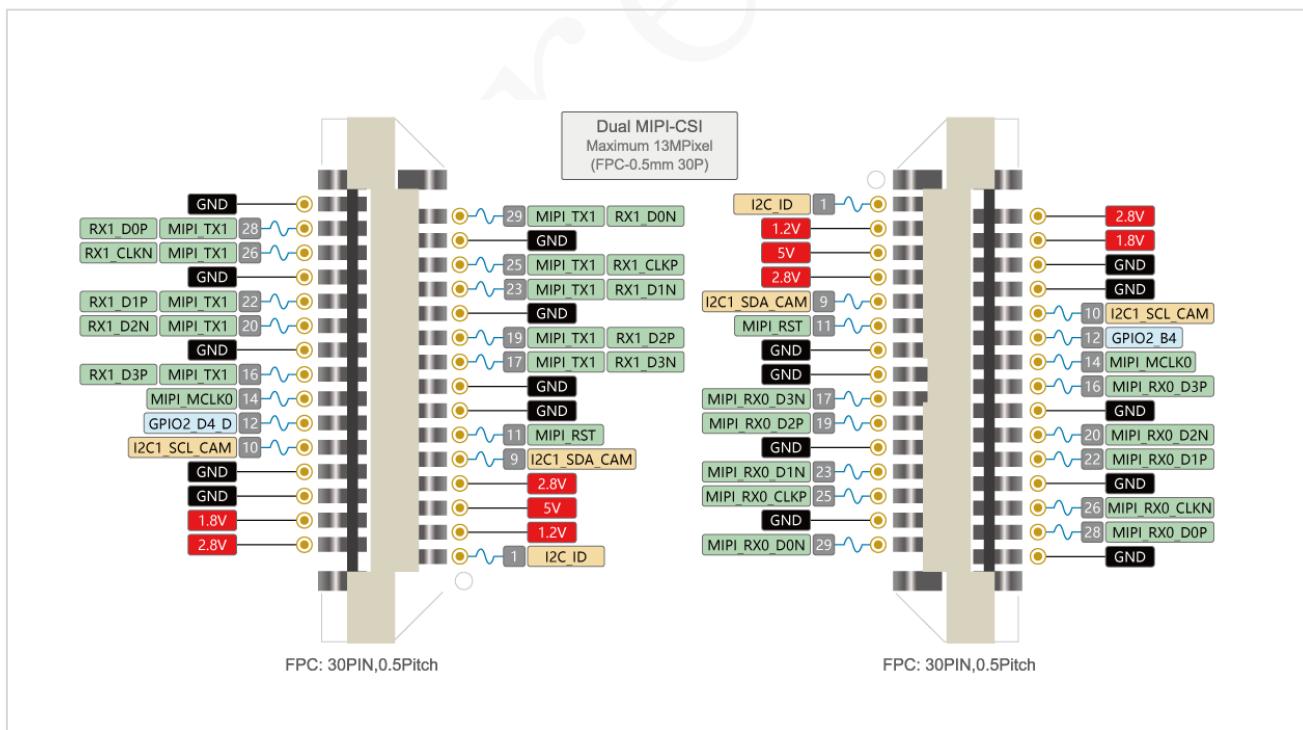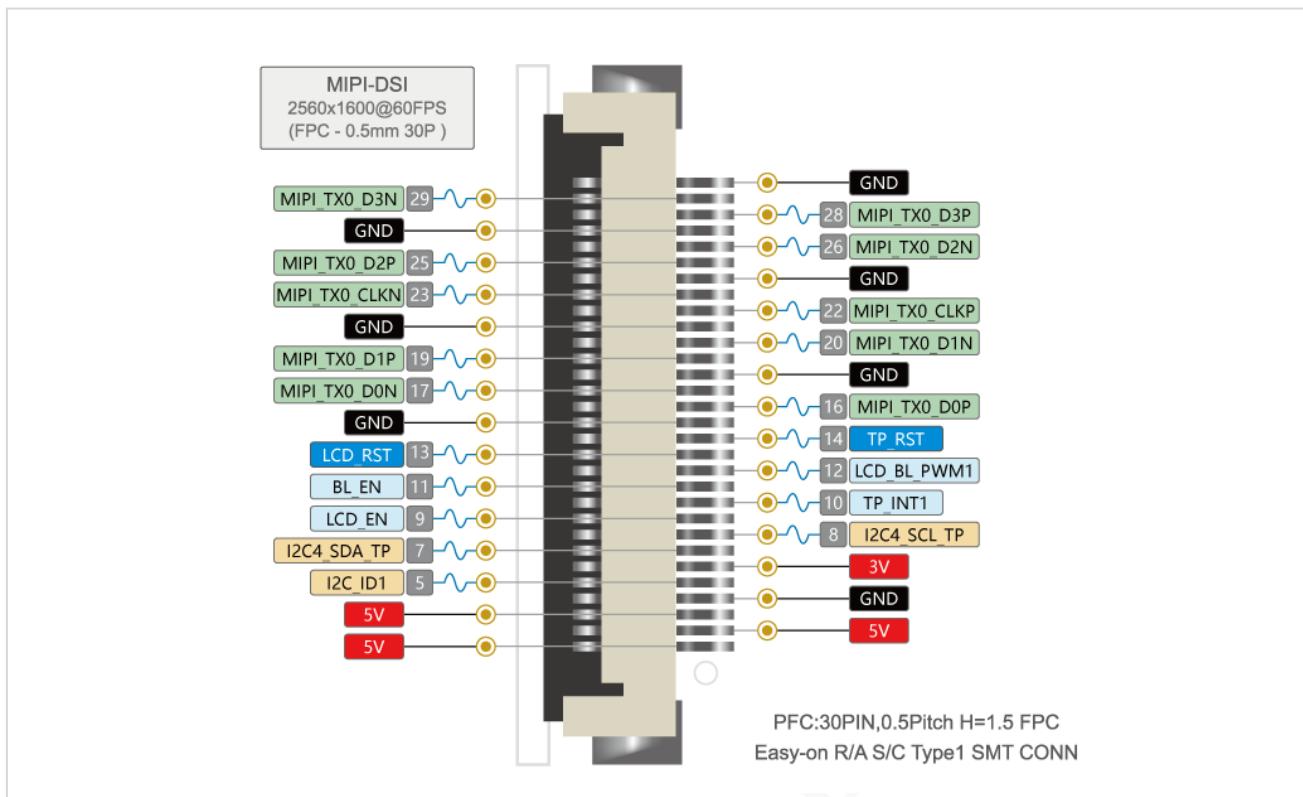

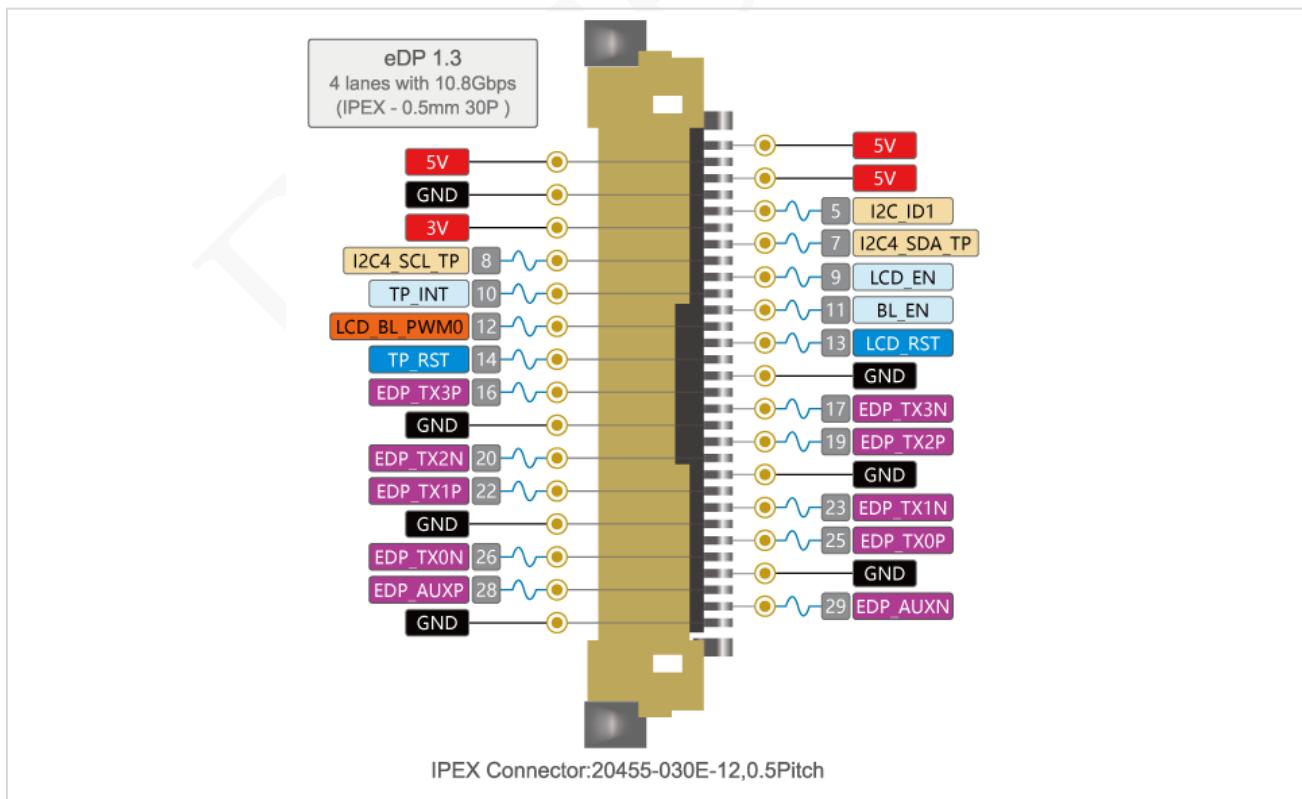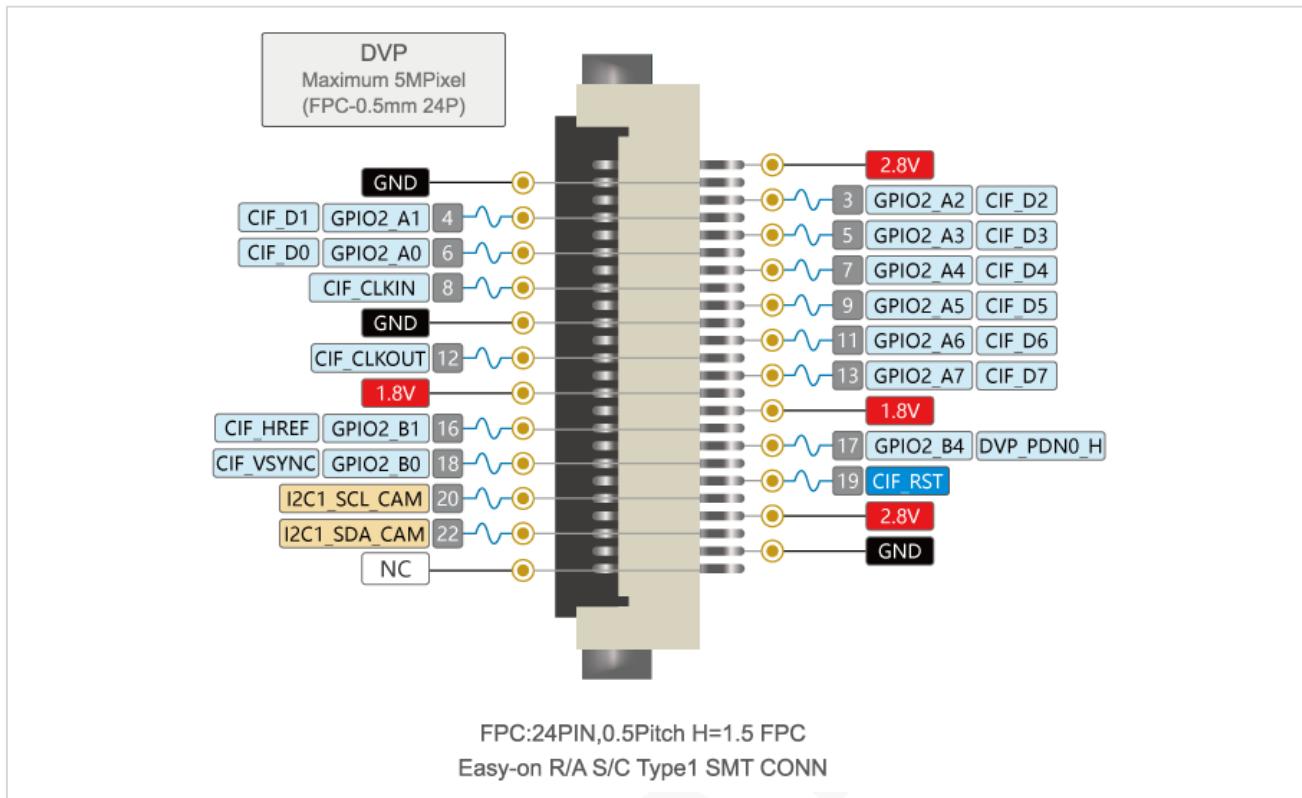




## 2. Hardware specifications

| Type                             | Specifications                                                                                                                                                                                                                                                                                                                                  |
|----------------------------------|-------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| CPU                              | RK3399, dual Cortex-A72 big core + quad Cortex-A53 small core. The highest basic frequency is 1.8 GHz.                                                                                                                                                                                                                                          |
| GUP                              | Quad core ARM Mali-T860<br>Support OpenGL ES 1.1/2.0 /3.0, OpenVG1.1, OpenCL, Directx11                                                                                                                                                                                                                                                         |
| DDR                              | 2GB / 4GB (Optional)<br>DDR-1866/DDR3L-1866/LPDDR3-1866/LPDR4                                                                                                                                                                                                                                                                                   |
| Memory                           | Support eMMC5.1 , SDIO3.0<br>8GB/16GB/32GB/64G/128G (Optional)                                                                                                                                                                                                                                                                                  |
| Decoding resolution / Multimedia | Support 4K video decoding up to 60fps<br>1080P multi-format video decoding<br>Support the encoding of 1080P videos with H.264 and VP8 formats                                                                                                                                                                                                   |
| Display                          | Dual VOP display:<br>It respectively supports 4096X2160 and 2560X1600 resolutions.<br>Support dual channel MIPI-DSI (4 wires per channel)<br>HDMI2.0 supports 4K 60Hz display, and HDCP 1.4/2.2<br>Support DisplayPort 1.2 (4 wires, up to 4K 60Hz)<br>Support eDP 1.3 (4 wires, 10.8 G bps)<br>Support gamut mappings of Rec.2020 and Rec.709. |
| Ports                            | The dual ISP pixel processing capability is up to 13MPix/s,<br>and it supports simultaneous data acquisition of dual cameras<br>Support dual USB3.0 Type-C port<br>Support PCIe 2.1 ( 4 full-duplex lanes )<br>Built-in MCU of low power consumption<br>Supports 8-channel digital microphone array input                                       |
| Network                          | RJ45 interface gigabit ethernet<br>Support 2.4GHz/5GHz dual-frequency WiFi, support 802.11a/b/g/n/ac protocols, Support Bluetooth 4.0                                                                                                                                                                                                           |
| USB                              | 2 x USB2.0 HOST , 1 x USB2.0 OTG , 2xUSB3.0                                                                                                                                                                                                                                                                                                     |
| Infrared receiver                | With a one-way infrared receiver,<br>it has the function of infrared remote control.                                                                                                                                                                                                                                                            |
| Power Input                      | 12/2A                                                                                                                                                                                                                                                                                                                                           |
| Size                             | 124mm x 93.5mm                                                                                                                                                                                                                                                                                                                                  |

### 3. PCB Size

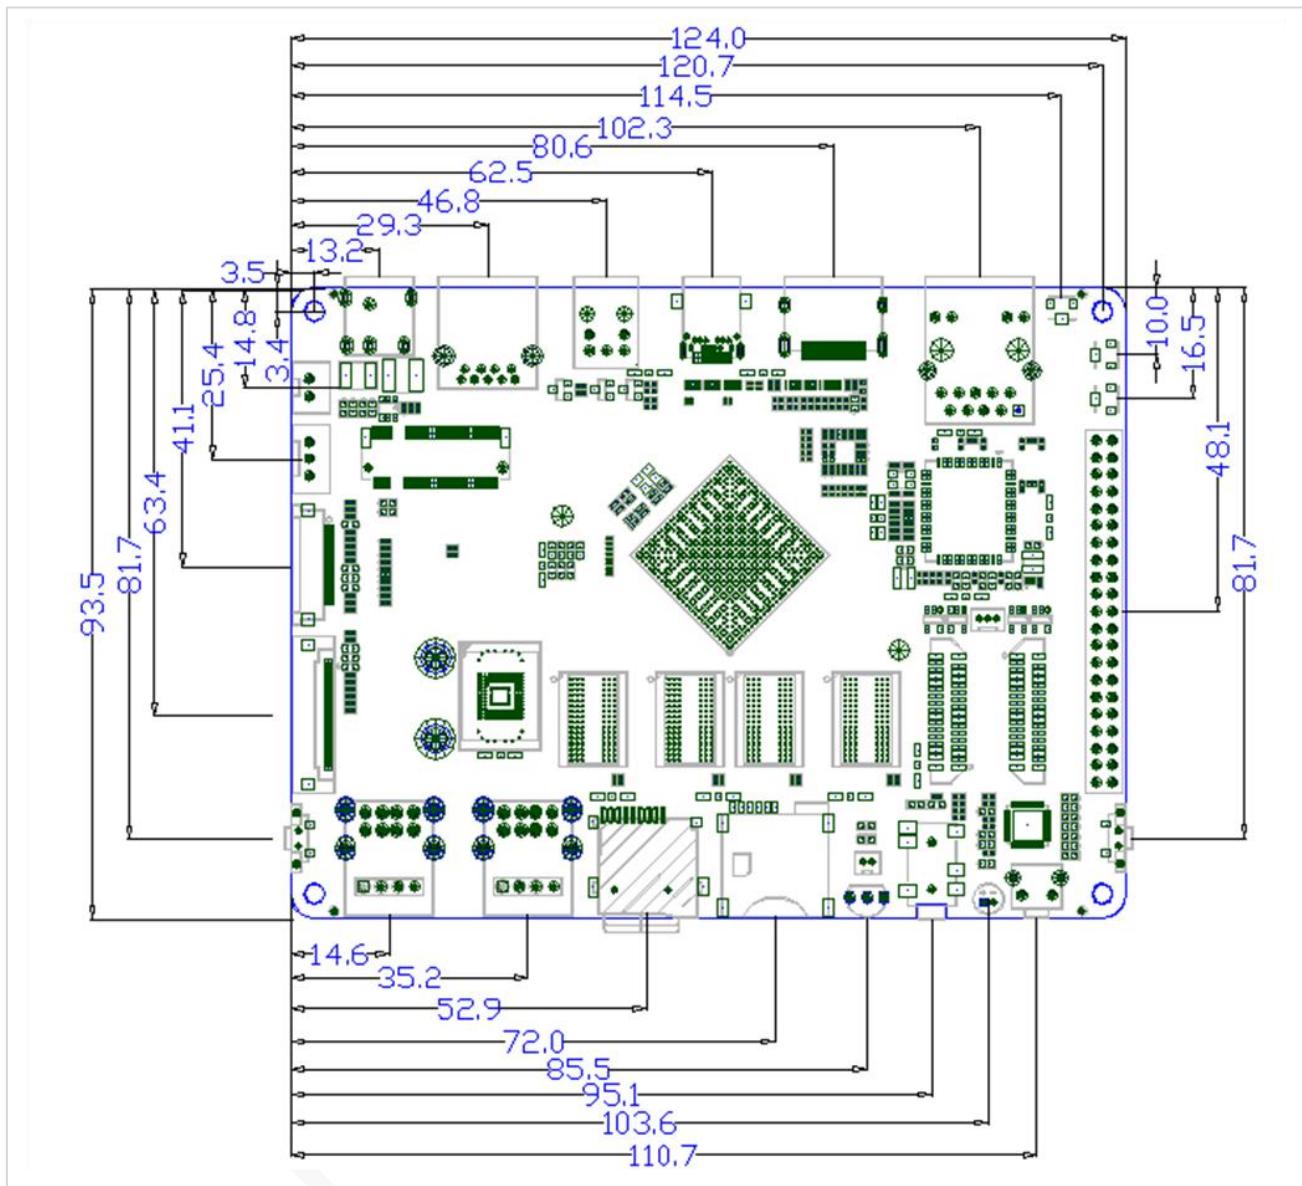

- Thickness : 1.6mm
- Size : 124mm \* 93.5mm
- Top surface height permitted : 14mm
- Undersurface height permitted : 5.5mm
- Screw hole size: 3mm



## 4. Extended interfaces

### 4.1 42PIN 2.54 spacing extension port

| No. | Definition   | No. | Definition           |
|-----|--------------|-----|----------------------|
| 1   | DC_12V       | 22  | GND                  |
| 2   | GND          | 23  | I2C1_SDA             |
| 3   | VCC_SYS      | 24  | I2C1_SCL             |
| 4   | GND          | 25  | I2C4_SDA             |
| 5   | VCC_SYS      | 26  | I2C4_SCL             |
| 6   | GND          | 27  | SPI1_CSN0/GPIO1_B2_U |
| 7   | VCC3V3_SYS   | 28  | SPI1_CLK/GPIO1_B1_U  |
| 8   | GND          | 29  | SPI1_RXD/GPIO1_A7_U  |
| 9   | ADC_IN0      | 30  | SPI1_TXD/GPIO1_B0_U  |
| 10  | ADC_IN2      | 31  | TP_RST               |
| 11  | GND          | 32  | LCD_RST              |
| 12  | I2S0_CLK     | 33  | LINE_OUT_L           |
| 13  | I2S0_SCLK    | 34  | LINE_OUT_R           |
| 14  | I2S0_LRCK_RX | 35  | GND                  |
| 15  | I2S0_LRCK_TX | 36  | GND                  |
| 16  | I2S0_SDIO    | 37  | SPK_LP               |
| 17  | I2S0_SDO0    | 38  | SPK_LN               |
| 18  | I2S0_SDO1    | 39  | GND                  |
| 19  | I2S0_SDO2    | 40  | GND                  |
| 20  | I2S0_SDO3    | 41  | SPK_RP               |
| 21  | GND          | 42  | SPK_RN               |



#### 4.2 port 1 for MIPI camera

| No. | Definition          | No. | Definition    |
|-----|---------------------|-----|---------------|
| 1   | VCC18_MIPI          | 18  | GND           |
| 2   | AF_28               | 19  | MIPI_RX0_D2P  |
| 3   | DVDD_1V2            | 20  | MIPI_RX0_D2N  |
| 4   | VCC18_MIPI          | 21  | GND           |
| 5   | VCC_SYS             | 22  | MIPI_RX0_D1P  |
| 6   | GND                 | 23  | MIPI_RX0_D1N  |
| 7   | VCC28_MIPI          | 24  | GND           |
| 8   | GND                 | 25  | MIPI_RX0_CLKP |
| 9   | I2C1_SDA_CAM        | 26  | MIPI_RX0_CLKN |
| 10  | I2C1_SCL_CAM        | 27  | GND           |
| 11  | MIPI_RST            | 28  | MIPI_RX0_D0P  |
| 12  | GPIO2_B4/DVP_PDN0_H | 29  | MIPI_RX0_D0N  |
| 13  | GND                 | 30  | GND           |
| 14  | MIPI_MCLK0          | 31  | GND           |
| 15  | GND                 | 32  | GND           |
| 16  | MIPI_RX0_D3P        | 33  | GND           |
| 17  | MIPI_RX0_D3X        | 34  | GND           |

#### 4.3 port 2 for MIPI camera

| No. | Definition             | No. | Definition      |
|-----|------------------------|-----|-----------------|
| 1   | 10K pull-down resistor | 18  | GND             |
| 2   | AF_28                  | 19  | MIPI_TX1/RX_D2P |
| 3   | DVDD_1V2               | 20  | MIPI_TX1/RX_D2N |
| 4   | VCC18_MIPI             | 21  | GND             |
| 5   | VCC_SYS                | 22  | MIPI_TX1/RX_D1P |
| 6   | GND                    | 23  | MIPI_TX1/RX_D1N |
| 7   | VCC28_MIPI             | 24  | GND             |



|    |                     |    |                  |
|----|---------------------|----|------------------|
| 8  | GND                 | 25 | MIPI_TX1/RX_CLKP |
| 9  | I2C1_SDA_CAM        | 26 | MIPI_TX1/RX_CLKN |
| 10 | I2C1_SCL_CAM        | 27 | GND              |
| 11 | MIPI_RST            | 28 | MIPI_TX1/RX_D0P  |
| 12 | GPIO2_D4_D/DVP_PDN1 | 29 | MIPI_TX1/RX_D0N  |
| 13 | GND                 | 30 | GND              |
| 14 | MIPI_MCLK0          | 31 | GND              |
| 15 | GND                 | 32 | GND              |
| 16 | MIPI_TX1/RX_D3P     | 33 | GND              |
| 17 | MIPI_TX1/RX_D3N     | 34 | GND              |

#### 4.4 CIF camera port

| No. | Definition      | No. | Definition          |
|-----|-----------------|-----|---------------------|
| 1   | AF_28           | 13  | GPIO2_A7/CIF_D7     |
| 2   | GND             | 14  | VCC1V8_DVP          |
| 3   | GPIO2_A2/CIF_D2 | 15  | VCC1V8_DVP          |
| 4   | GPIO2_A1/CIF_D1 | 16  | GPIO2_B1/CIF_HREF   |
| 5   | GPIO2_A3/CIF_D3 | 17  | GPIO2_B4/DVP_PDN0_H |
| 6   | GPIO2_A0/CIF_D0 | 18  | GPIO2_B0/CIF_VSYNC  |
| 7   | GPIO2_A4/CIF_D4 | 19  | CIF_RST             |
| 8   | CIF_CLKIN       | 20  | I2C1_SCL_CAM        |
| 9   | GPIO2_A5/CIF_D5 | 21  | VCC2V8_DVP          |
| 10  | GND             | 22  | I2C1_SDA_CAM        |
| 11  | GPIO2_A6/CIF_D6 | 23  | GND                 |
| 12  | CIF_CLKOUT      | 24  | NC                  |



#### 4.5 EDP display port

| No. | Definition  | No. | Definition |
|-----|-------------|-----|------------|
| 1   | VCC_SYS     | 16  | EDP_TX3P   |
| 2   | VCC_SYS     | 17  | EDP_TX3N   |
| 3   | VCC_SYS     | 18  | GND        |
| 4   | GND         | 19  | EDP_TX2P   |
| 5   | VCC_3V0     | 20  | EDP_TX2N   |
| 6   | VCC_3V0     | 21  | GND        |
| 7   | I2C4_SDA_TP | 22  | EDP_TX1P   |
| 8   | I2C4_SCL_TP | 23  | EDP_TX1N   |
| 9   | LCD_EN      | 24  | GND        |
| 10  | TP_INT      | 25  | EDP_TX0P   |
| 11  | BL_EN       | 26  | EDP_TX0N   |
| 12  | LCD_BL_PWM0 | 27  | GND        |
| 13  | LCD_RST     | 28  | EDP_AUXP   |
| 14  | TP_RST      | 29  | EDP_AUXN   |
| 15  | GND         | 30  | GND        |

#### 4.6 PCIe M.2 B-Key port

| No. | Definition     | No. | Definition |
|-----|----------------|-----|------------|
| 1   | Low efficiency | 35  | PCIE_TX0P  |
| 2   | PCIE_3V3       | 36  | PCIE_TX2N  |
| 3   | GND            | 37  | GND        |
| 4   | PCIE_3V3       | 38  | PCIE_TX2P  |
| 5   | GND            | 39  | PCIE_RX0_N |
| 6   | NC             | 40  | GND        |
| 7   | USB_DP         | 41  | PCIE_RX0_P |
| 8   | PCIE_DISABLE   | 42  | PCIE_RST   |
| 9   | USB_DM         | 43  | GND        |



|    |            |    |               |
|----|------------|----|---------------|
| 10 | NC         | 44 | PCIE_CLKREQ   |
| 11 | GND        | 45 | PCIE_REF_CLKN |
| 12 | NC         | 46 | PCIE_WAKE     |
| 13 | GND        | 47 | PCIE_REF_CLKP |
| 14 | NC         | 48 | VCC_SYS       |
| 15 | DC_12V     | 49 | GND           |
| 16 | GND        | 50 | VCC_SYS       |
| 17 | DC_12V     | 51 | I2C1_SDA_PCIE |
| 18 | PCIE_RX3_N | 52 | NC            |
| 19 | GND        | 53 | NC            |
| 20 | PCIE_RX3_P | 54 | NC            |
| 21 | PCIE_TX1N  | 55 | NC            |
| 22 | GND        | 56 | NC            |
| 23 | PCIE_TX1P  | 57 | NC            |
| 24 | PCIE_TX3N  | 58 | NC            |
| 25 | GND        | 59 | PCIE_RESET    |
| 26 | PCIE_TX3P  | 60 | RTC_CLK_OUT   |
| 27 | PCIE_RX1_N | 61 | GND           |
| 28 | GND        | 62 | PCIE_3V3      |
| 29 | PCIE_RX1_P | 63 | GND           |
| 30 | PCIE_RX2_N | 64 | PCIE_3V3      |
| 31 | GND        | 65 | GND           |
| 32 | PCIE_RX2_P | 66 | PCIE_3V3      |
| 33 | PCIE_TX0N  | 67 | GND           |
| 34 | GND        |    |               |



#### 4.7 Mini PCIE port

| No. | Definition | No. | Definition |
|-----|------------|-----|------------|
| 1   | NC         | 27  | GND        |
| 2   | VCC3V3_3G  | 28  | NC         |
| 3   | NC         | 29  | GND        |
| 4   | GND        | 30  | NC         |
| 5   | NC         | 31  | NC         |
| 6   | NV         | 32  | NC         |
| 7   | NC         | 33  | NC         |
| 8   | UIM_PWR    | 34  | GND        |
| 9   | GND        | 35  | GND        |
| 10  | UIM_DAT    | 36  | 3G_USB_DM  |
| 11  | NC         | 37  | GND        |
| 12  | UIM_CLK    | 38  | 3G_USB_DP  |
| 13  | NC         | 39  | VCC3V3_3G  |
| 14  | UIM_RST    | 40  | GND        |
| 15  | GND        | 41  | VCC3V3_3G  |
| 16  | NC         | 42  | NC         |
| 17  | GND        | 43  | GND        |
| 18  | GND        | 44  | NC         |
| 19  | NC         | 45  | NC         |
| 20  | NC         | 46  | NC         |
| 21  | GND        | 47  | NC         |
| 22  | PE_RST     | 48  | NC         |
| 23  | NC         | 49  | NC         |
| 24  | NC         | 50  | GND        |
| 25  | NC         | 51  | NC         |
| 26  | GND        | 52  | VCC3V3_3G  |



## 5. System software

| Type                 | Description                                                                                                                                                                                                                              |
|----------------------|------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| Operating system     | Android 7.1、Android 6.0、Linux、Ubuntu 16.04、u-boot                                                                                                                                                                                        |
| Programming language | Java、C、C++、Kotlin、Shell、Python                                                                                                                                                                                                           |
| Getting sources      | Android: <a href="https://gitlab.com/TeeFirefly/FireNow-Marshmallow">https://gitlab.com/TeeFirefly/FireNow-Marshmallow</a><br>Linux: <a href="https://gitlab.com/TeeFirefly/linux-kernel">https://gitlab.com/TeeFirefly/linux-kernel</a> |

## 6. Electrical Performance

| Items                                                     | Minimum           | Typical | Maximum |
|-----------------------------------------------------------|-------------------|---------|---------|
| Power supply voltage                                      | Voltage           | ---     | 12V     |
|                                                           | Power ripple      | ---     | 72mV    |
| Supply current<br>(HDMI output only)                      | Operating current | ---     | 228mA   |
|                                                           | Stand-by current  | ---     | 174mA   |
| Supply current<br>(Only Firefly EDP screen is connected.) | Operating current | ---     | 390mA   |
|                                                           | Stand-by current  | ---     | 268mA   |
| RTC shutdown power consumption                            | Operating current | 2uA     |         |
| Operating temperature                                     | Celsius           | -20 °C  | ---     |
|                                                           |                   |         | 60 °C   |



## Appendix

### 1 Source code acquisition

Please visit the official website "Resource Download": ( [please click here](#) )

### 2 Contact us

|                                                                                    |                          |                                                                                          |
|------------------------------------------------------------------------------------|--------------------------|------------------------------------------------------------------------------------------|
|  | Company                  | T-chip Intelligent Technology Co.,Ltd.                                                   |
|                                                                                    | Address                  | Room 2101,No.1Hongyu Building, #57 Zhongshan<br>4Rd, East District, Zhongshan, Guangdong |
|                                                                                    | Mobile                   | (+86) 186 8811 7175                                                                      |
|                                                                                    | National service hotline | 4001-511-533                                                                             |
|                                                                                    | Telephone                | 0760-89881218                                                                            |
|                                                                                    | Zip code                 | 528400                                                                                   |
|                                                                                    | Business                 | <a href="mailto:sales@t-firefly.com">sales@t-firefly.com</a>                             |
|                                                                                    | Website                  | <a href="http://www.t-firefly.com">www.t-firefly.com</a>                                 |