



10-node 1570T Cluster Server

- CSB1-N10NOrinNano
- CSB1-N10NOrinNX



V1.0 2024-12-30

T-CHIP INTELLIGENCE TECHNOLOGY

Product features



1570TOPS powerful computing power

The total computing power of the server is up to 1570TOPS, with 10 built-in distributed computing nodes + 1 control node, which can run mainstream modern AI models: ROS robot models, etc.



Powerful multi-channel video processing capabilities

It supports up to 10 channels of H.265 8K@30fps, 20 channels of H.265 4K@60fps video decoding, and 10 channels of H.265 4K@60fps video encoding.



The private deployment of large models

Large language models: Support Ollama local large model deployment framework and the private deployment of ultra-large-scale parametric models: Llama3 and Phi-3 Mini.

Vision models: Support EfficientViT, NanoOWL, NanoSAM, SAM and TAM.

AI painting: Support ComfyUI graphical deployment framework and the private deployment of Flux, Stable Diffusion image generation model in the AIGC field.



Multiple deep learning frameworks

Supports multiple deep learning frameworks accelerated by cuDNN, including PaddlePaddle, PyTorch, TensorFlow, MATLAB, MxNet, Caffe2, Chainer and Keras, as well as custom operator development. Docker containerization technology is supported.

Product features



Secure and high-speed network communication

It has 2×10 Gigabit Ethernet ports, 2×Gigabit Ethernet ports, and 1×BMC management network interface, so that network communication has a higher speed.



Standard 1U rack server

Highly dense and tightly deployed, with 10 computing modules per unit; The standard 1U rack server chassis design perfectly matches most types of cabinets in the data center.



Equipped with BMC management system

Equipped with BMC intelligent management system, it can easily complete real-time monitoring, software configuration, hardware management, troubleshooting, system upgrade, and can provide secondary development.



Wide range of application scenarios

It is widely used in edge computing, robotics, large model localization, smart city, smart healthcare, smart industry and other industries.


Specifications




		CSB1-N10NOrinNano	CSB1-N10NOrinNX
Technical Specifications	Server form	1U rack-mounted computing power server	
	Framework	ARM architecture	
	Number of nodes	10 distributed computing nodes (up to 80 ARM cores) + 1 control node	
	Compute nodes	Hexa-core 64-bit processor NVIDIA Jetson OrinNano, main frequency up to 1.7GHz	Octa-core 64-bit processor NVIDIA Jetson OrinNX, main frequency up to 2.0GHz
	Control nodes	Octa-core 64-bit processor RK3588, main frequency up to 2.4GHz, the highest computing power is 6TOPS	
	AI computing power	670TOPS (INT8)	1570TOPS (INT8)
	RAM	8GB LPDDR5 × 10 (Number of compute nodes)	16GB LPDDR5 × 10 (Number of compute nodes)
	Storage	256GB (2242 PCIe NVMe SSD, the server is internally assembled)	
	Storage Expansion	3.5-inch/2.5-inch SATA3.0/SSD hard drive slot × 1 (BMC can directly operate the hard drive, and computing child nodes can indirectly access the hard drive through the network sharing method provided by BMC)	
	Power	550W AC power supply (Input: 90V AC~264V AC, 47 Hz~63 Hz, 8A) (Hot swappable not supported)	
	Fan module	6 high-speed cooling fans	
Physical Specifications	Size	420.0mm(L) × 421.3mm(W) × 44.4mm(H)	
	Installation requirements	IEC 297 Universal Cabinet Installation: 19 inches wide and 800 mm deep and above Retractable slideway installation: The distance between the front and rear holes of the cabinet is 543.5mm~848.5mm	
	Full weight	Server net weight: 8.1kg, total weight with packaging: 10.3kg	
	Environment	Operating Temperature: 0°C ~ 45°C, Storage Temperature: -40°C ~ 60°C, Operating Humidity: 5% ~ 90%RH(non-condensing)	
Software Specifications	BMC	The BMC management system is integrated with the web-based management interface, supporting Redfish, VNC, NTP, monitoring advanced and virtual media, and the BMC management system can be redeveloped.	
	Large model	Robot model: ROS robot model is supported. Large language models: Support Ollama local large model deployment framework, which can be used for natural language processing, code generation, and assistance scenarios. Support the private deployment of ultra-large-scale parametric models under the Transformer architecture, such as Llama3 and Phi-3 Mini. Large visual models: Support the privatization deployment of large visual models such as EfficientViT, NanoOWL, NanoSAM, SAM and TAM. AI Painting: Support ComfyUI graphical deployment framework, which can be used for scenarios such as image restoration, image style conversion, and image synthesis. Supports the private deployment of Flux, Stable Diffusion and Stable Diffusion XL image generation model in the AIGC field.	
	Deep learning	Supports multiple deep learning frameworks accelerated by cuDNN, including PaddlePaddle, PyTorch, TensorFlow, MATLAB, MxNet, Caffe2, Chainer and Keras. Supports custom operator developmen. Docker containerization: Docker containerization technology is supported, which can be easily used for image deployment.	
	AI software stack	The NVIDIA Jetson Orin series delivers powerful AI compute power, massive unified memory, and a comprehensive software stack to power the latest generative AI applications. It enables fast inference on any generative AI model powered by the Transformer architecture, enabling superior edge performance on MLPerf.	
Interface Specifications	Internet	2 × 10G Ethernet (SFP+), 2 × Gigabit Ethernet (RJ45), 1 × Gigabit Ethernet (RJ45, MGNT is used as BMC management network)	
	Console	1 × Console (RJ45, BMC debug serial port, baud rate 115200)	
	Display	1 × VGA (maximum resolution 1080P, BMC management display)	
	USB	2 × USB3.0 (The lower USB is USB3.0 OTG, and the BMC can be upgraded OTG by using a USB flash drive)	
	Button	1 × Reset, 1 × UID, 1 × Power button	
	Other interfaces	1 × RS232 (DB9, baud rate 115200), 1 × RS485 (DB9, baud rate 115200)	

Interface description

Front view

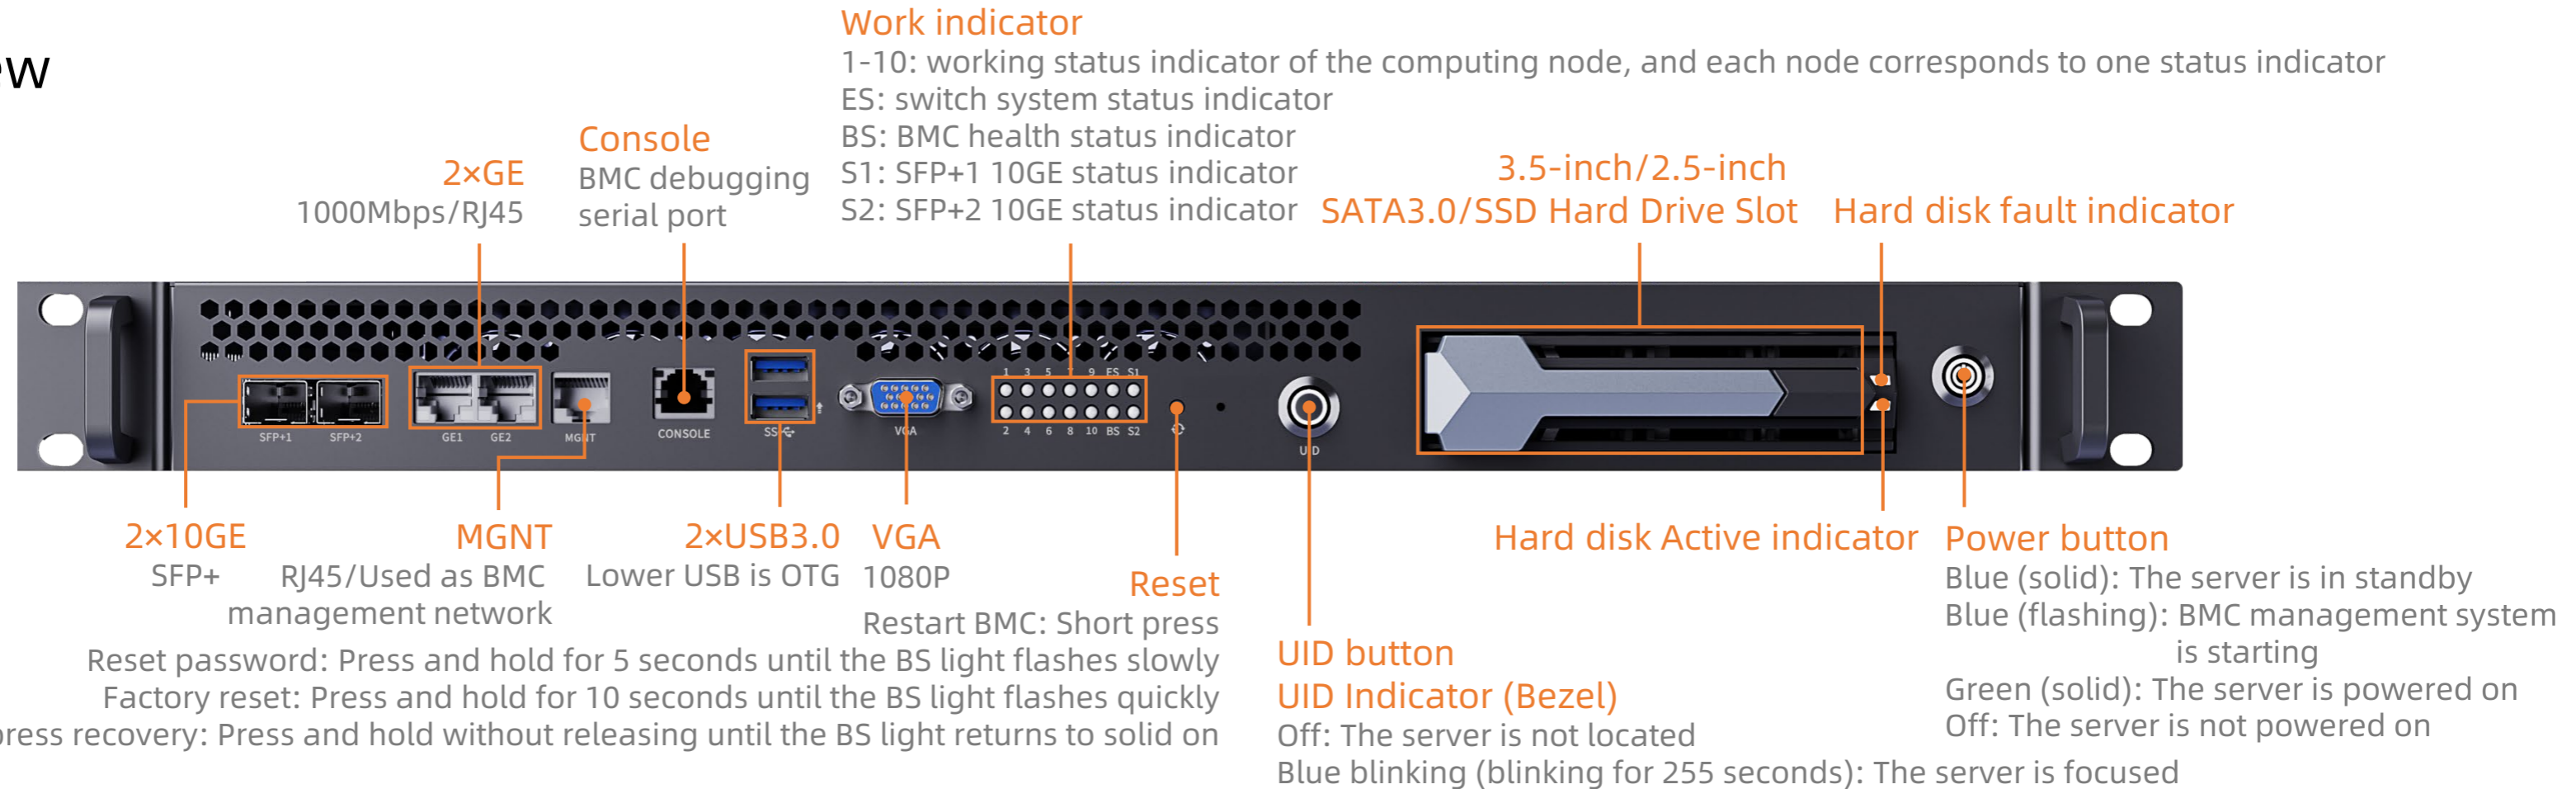

Rear view

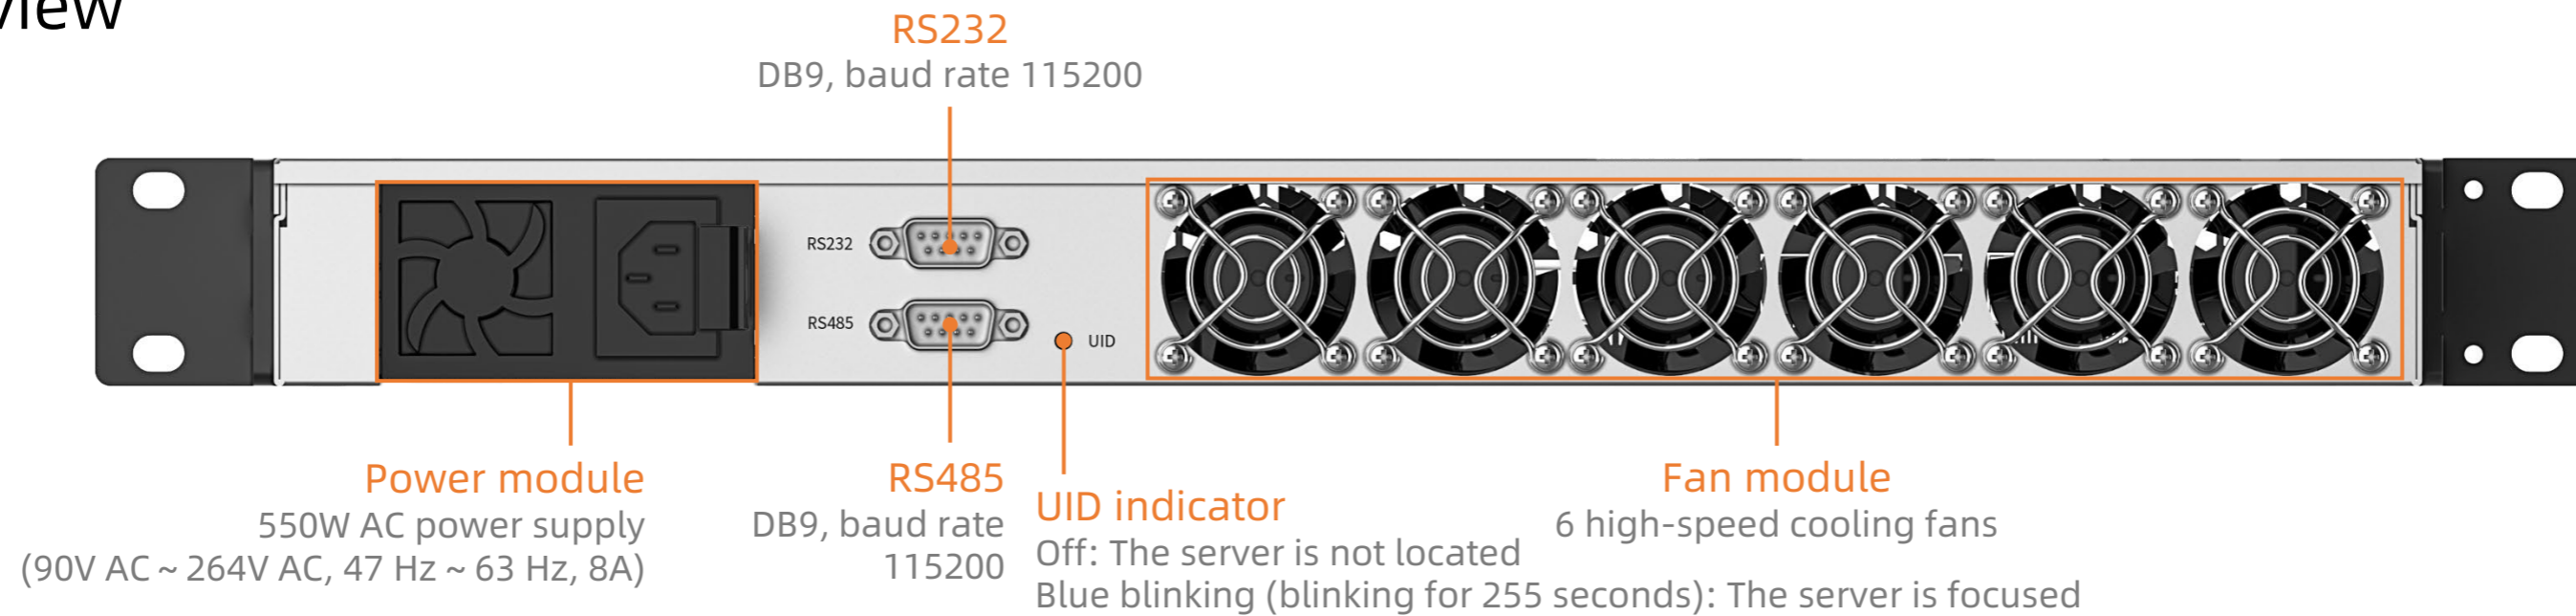

Dimension





T-CHIP INTELLIGENCE TECHNOLOGY



Contact Us
(+86)18688117175



E-mail
global@t-firefly.com



Website
<https://en.t-firefly.com/>



Address
Room 2101, Hongyu Building, #57 Zhongshan 4Rd, East District,
Zhongshan, Guangdong, China.