




AIO-1684XJD4


32T High Computing Power AI MainBoard

T-CHIP INTELLIGENCE TECHNOLOGY

V1.0

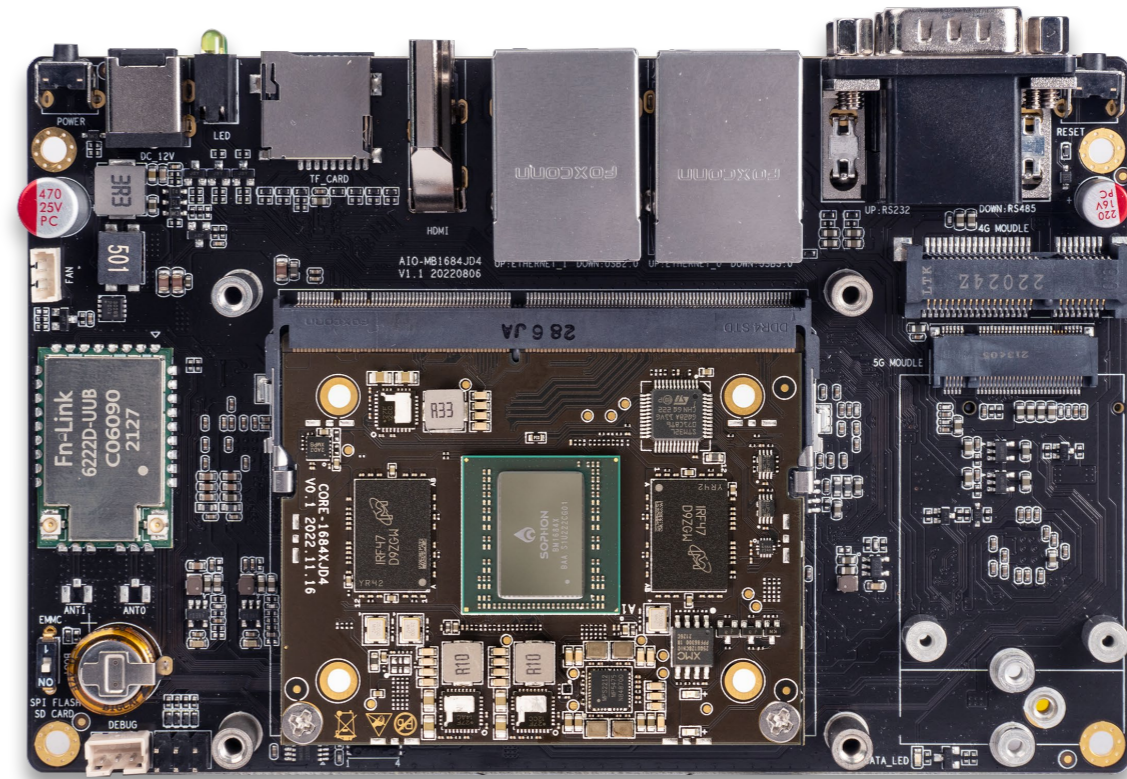

Product features

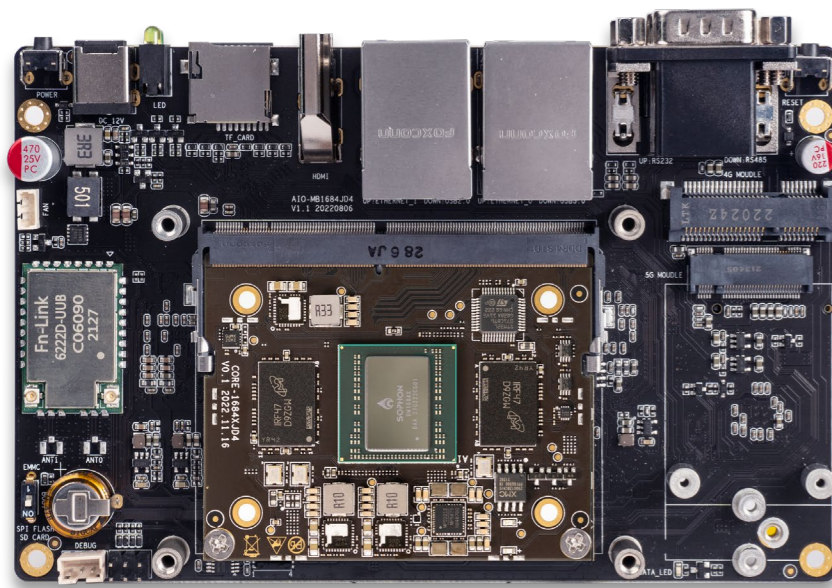


New-gen AI processor

SOPHON AI processor BM1684X
32TOPS(INT8), 16TFLOPS(FP16/BF16)
2TFLOPS(FP32)
Super High Computing Power



Powerful video AI performance

32-channel H.265 1080p video decoding, 32-channel H.265 1080P HD video full process processing (decoding+AI analysis), 12-channel H.265 1080p video encoding



A variety of interfaces

HDMI, M.2 SATA, USB3.0, USB2.0, RS485, RS232, it can be directly applied to AI edge computing products



One-stop toolkit/SOPHON SDK

SOPHON SDK one-stop deep learning development toolkit provides a series of software tools, It supports Caffe/TF/PyTorch/Mxnet/Paddle



High throughput

Based on INT8 quantified Batch4 measured data, it has higher throughput and energy efficiency ratio



A wide range of applications






Visual computing, edge computing, general computing power services, Artificial Intelligence, intelligent construction site, transportation, security surveillance

Specifications




	Specification
SOC	SOPHON BM1684X
CPU	Integrated high-performance ARM A53, 12nm lithography process, clock speed up to 2.3GHz
TPU	Built-in tensor computing module TPU, computing power up to: 32TOPS (INT8), 16TFLOPS (FP16/BF16), 2TFLOPS (FP32) Support mainstream programming frameworks, such as TensorFlow / Caffe / PyTorch / Paddle / ONNX / MXNet / DarkNet
Encoding/Decoding	32-channel H.265/H.264 1080p@25fps video decoding、 32-channel 1080P@25fps HD video full process processing (decoding+AI analysis) 12 -channel H.265/H.264 1080p@25fps video encoding
RAM	6GB/12GB/16GB LPDDR4/LPDDR4X
Storage	32GB/64GB/128GB eMMC, 128MB SPI Flash, 1*M.2 SATA3.0 SSD (2242), 1*TF Card
Ethernet	2*Gigabit Ethernet (1000Mbps/RJ45)
Wireless	2.4GHz/5GHz Dual-band WiFi, 802.11a/b/g/n/ac, extended to 4G LTE (Mini PCIe), 5G (M.2)
Video Output	1*HDMI (1080p@30fps)
USB	2*USB3.0 (Max:1A), 2*USB2.0 (Max:500mA)
Interface	1*RS232, 1*RS485, 1*Debug (3P-2.0mm), 1*FAN(12V, 4P-1.25mm)
OS	Linux
Power	DC 12V/5A (DC 5.5×2.5mm, support 9V~16V wide voltage input)
Power consumption	Normal: 24W(12V/2000mA), Max: 42W(12V/3500mA)
Dimension	149mm * 97mm * 37.45mm
Weight	≈ 180g
Environment	Operating Temperature: -20°C ~ 60°C, Storage Temperature: -20°C ~ 70°C, Storage humidity: 10% ~ 90%RH (non-condensing)

Interface description

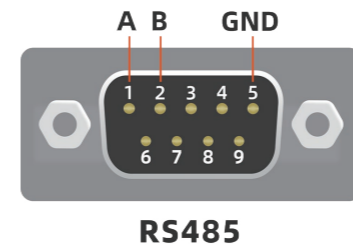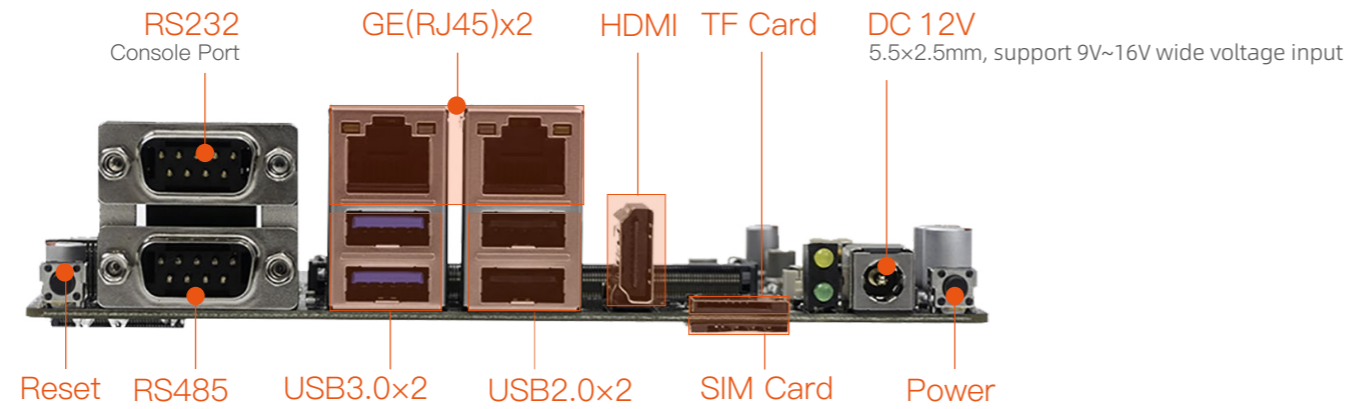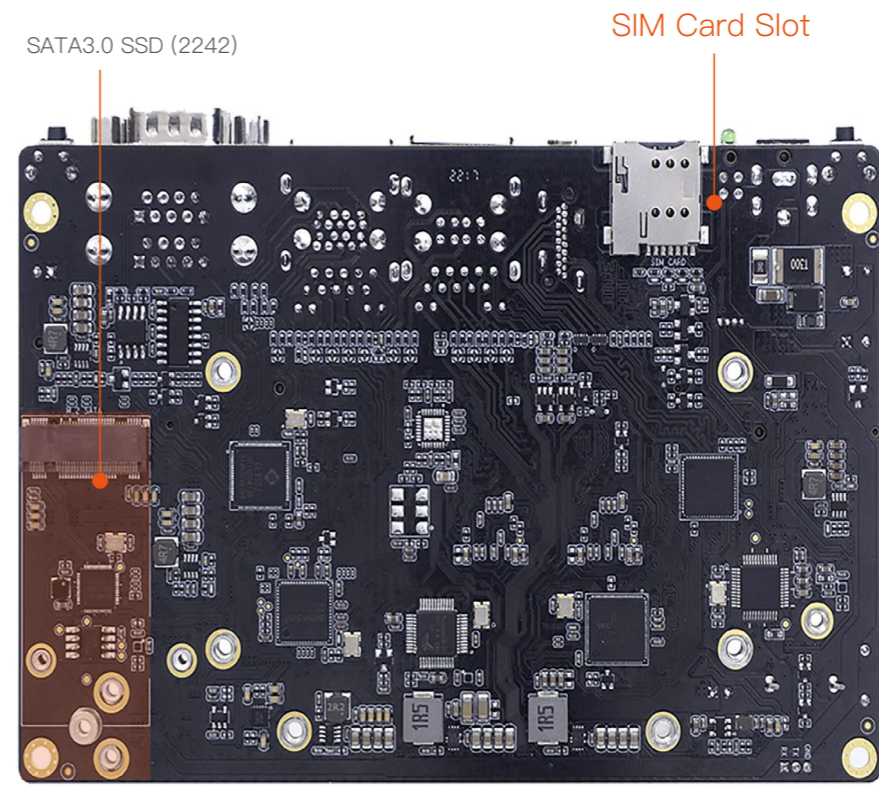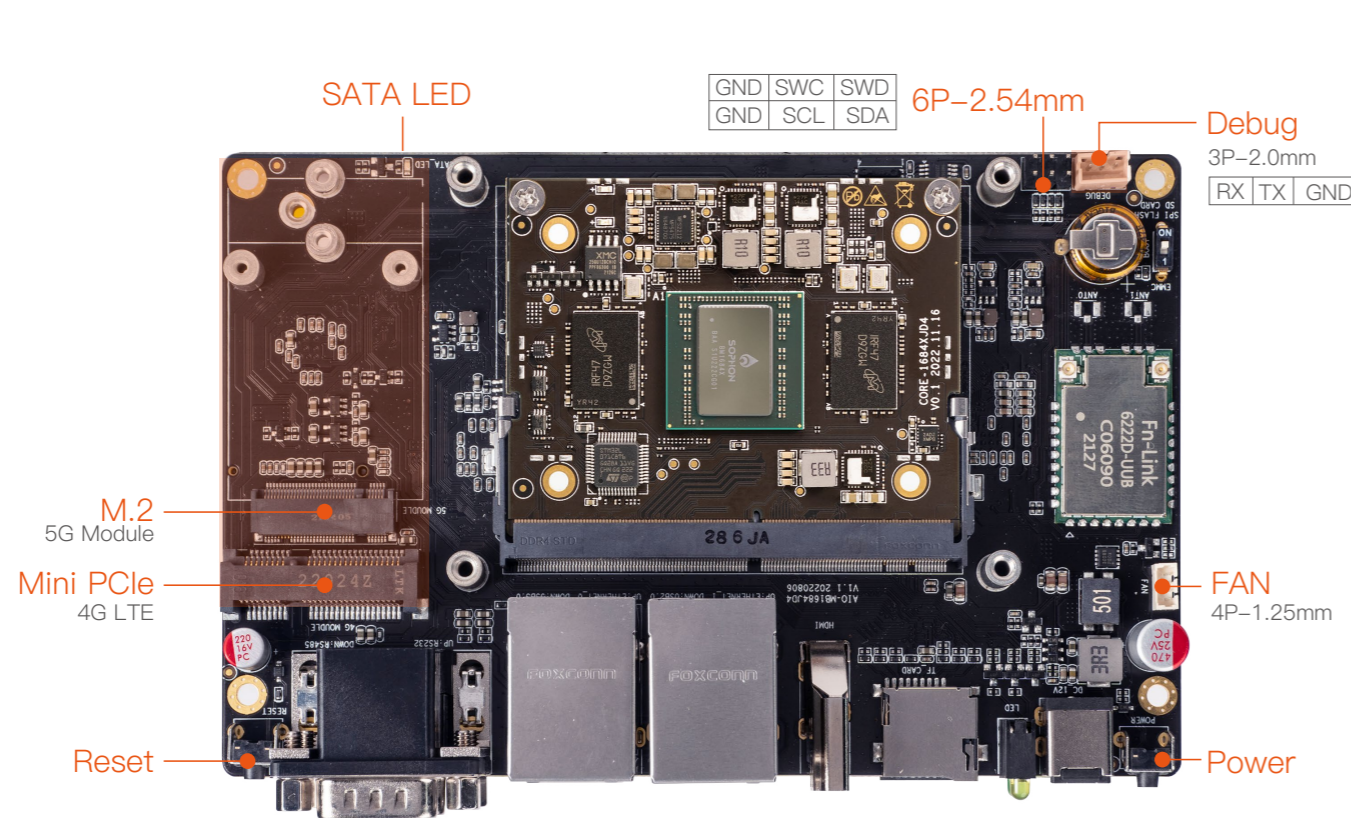

Dimension

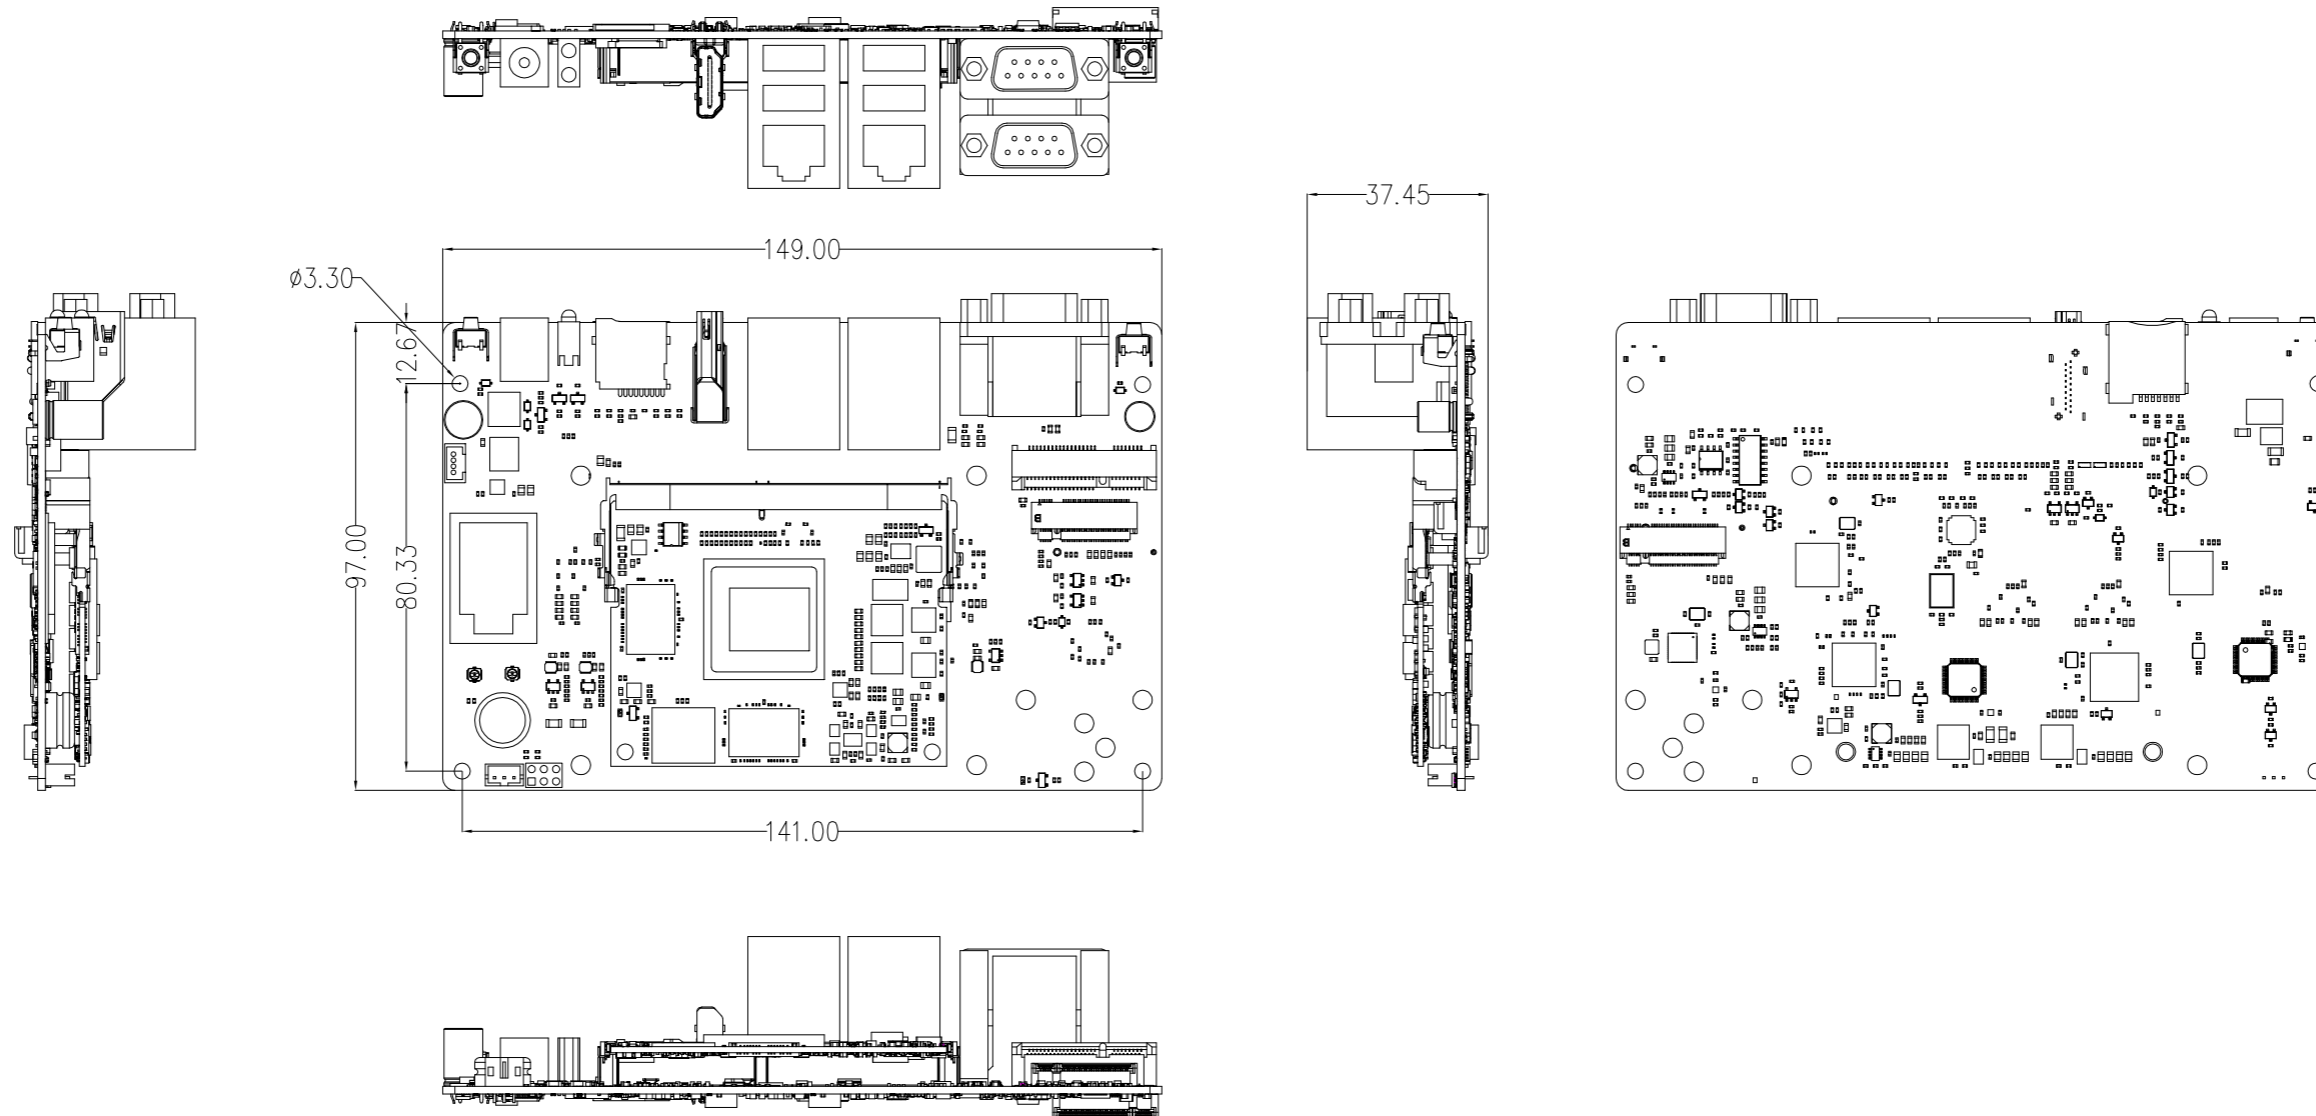



T-CHIP INTELLIGENCE TECHNOLOGY



Contact Us
(+86)18688117175



E-mail
global@t-firefly.com



Website
www.t-firefly.com



Address
Room 2101, Hongyu Building, #57 Zhongshan 4Rd, East District,
Zhongshan, Guangdong, China.